

IMPORTANT!

OPERATIONAL INSTRUCTIONS



Instructions for pairing remote to rgbmcv2 if remote is not working. Only one remote can be paired to the controller.

Press and hold music up and down at same time while plugging power into the rgbmcv2 control box. Should flash white three times to confirm pairing with remote.



RF RGB MUSIC CONTROLLER

The Wet Sounds RF RGB Music Controller is a multi-function RGB LED MUSIC Controller. It utilizes the most advanced PWM remote control technology. The RF-RGB-MC controls full color LED lighting with four lines, three circuits (common anode), with more than 640000 combination colors. It has 5 multi-light changing modes and 3 music sensitive modes for your choice in environmental scenes! The 433Mz Wide Range RF wireless remote control technology features low power consumption, long distance transmission, and anti-interference circuitry. The sleek and stylish remote has a simple functionality design for ease of color control, brightness, dimming, and music scenes. The capacitive touch screen design not only makes the remote easy to use but is very cool too!

Safety matters! Please follow all 12v installation guidelines for safe use on your vehicle. 

1. Do not install the product in areas with a strong magnetic field or high SPL sound pressure.
2. Make sure your connections are correct and the controller plus each LED run is individually fused to protect from a short circuit.
3. Please install the controller in an area with good ventilation to ensure proper heat dissipation.
4. Please ensure that the RF-RGB-MC has a fused 12v power input.
5. Please connect all RGB strips to the unit before connecting to 12v power.
6. Wire the Wet Sounds RF-RGB-MC to a master switch to shut off power when put into storage or the vehicle is not in use.
7. Please contact Wet Sounds for any questions concerning your Wet Sounds RF-RGB-MC.


Maintenance

Inspect the wiring and RF-RGB-MC connectivity before each outing.

If you determine that the wiring or unit is damaged then disconnect until the wiring or unit is repaired.

If you determine that the RGB strip is damaged then power down the RF-RGB-MC until RGB strip is replaced.

Wet Sounds RF-RGB-MC Remote control functions

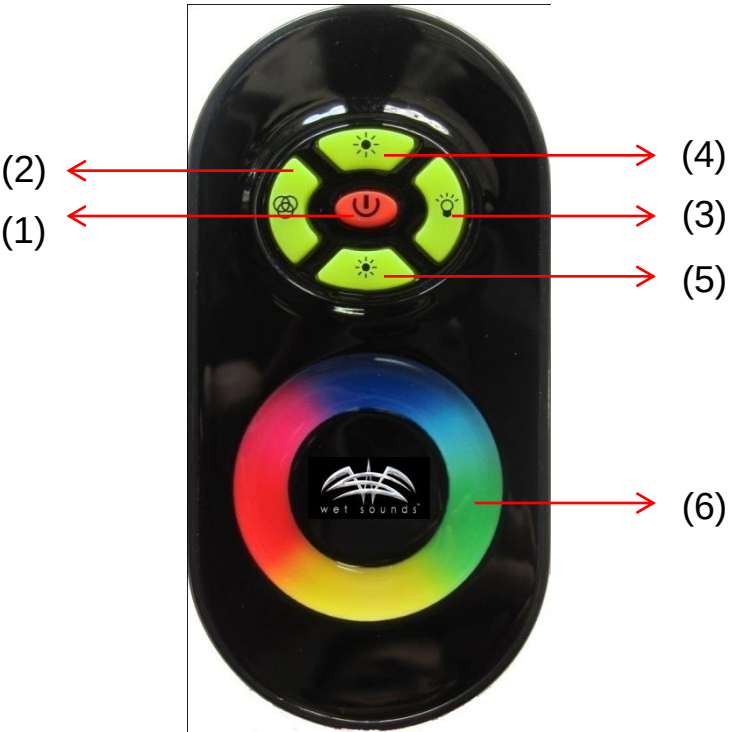

Button	Function
1	Power on/off button
2	Multicolor changing mode (5 modes)
3	Music control mode (3 modes)
4	Increase the brightness of the light in single color mode and music control mode. Increase the speed of the light in multicolor changing mode.
5	Decrease the brightness of the light in single color mode and music control mode. Decrease the speed of the light in multicolor changing mode.
6	Select the color (capacitive touch)

Multicolor Changing Mode


Mode 1	Each color will be displayed in flash mode.
Mode 2	Single color will be displayed in flash mode. Select any color to show in flash mode.
Mode 3	This mode will be displayed in a different mixed color.
Mode 4	Each color will be displayed in a smooth change brightness.
Mode 5	Single color will be displayed in a smooth change brightness. Select any color to show in this mode.

Music Control Mode

Mode 1	The LED will activate to the BEAT of the music (>60 dB) . NO MUSIC = NO LED Activity!!
Mode 2	Single color light will activate with the beat of the music (>60 dB). NO MUSIC = NO LED Activity!! Select any color to show in this mode.
Mode 3	The LED will activate with the BEAT of the music (>60 dB) . NO MUSIC, the lamp will display in a different mixed colors !!

MEMORY FUNCTION : The Controller will keep the last mode in memory by power switch ON/ OFF

Top view

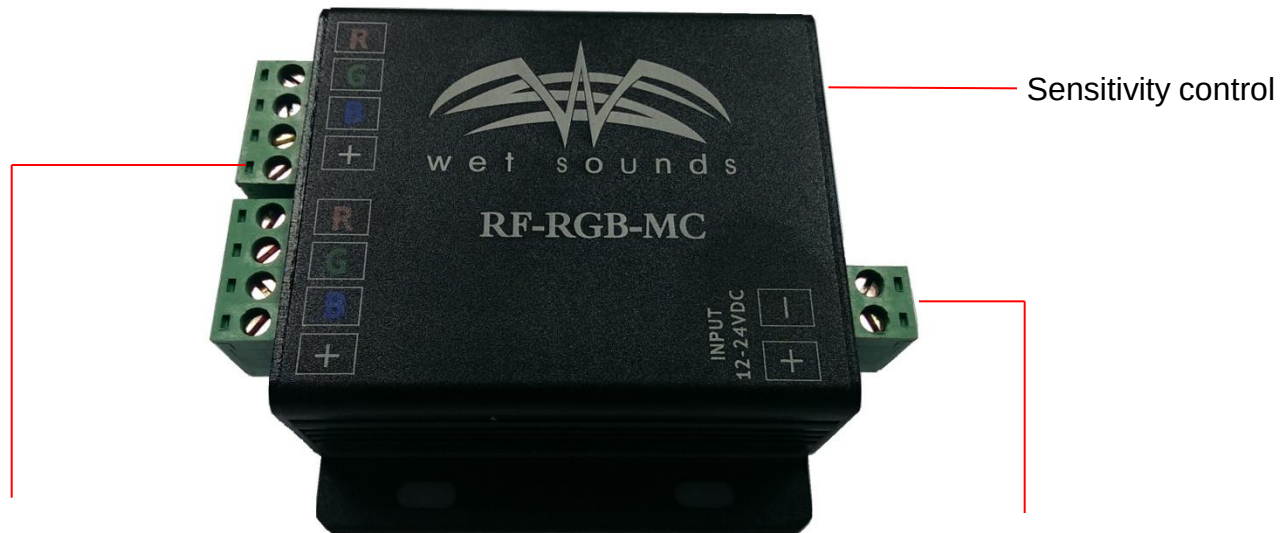

2 way-output (for RGB LED Strips)

Input for power supply 12 VDC (RED 12v Positive, Black 12v Ground)

Side view

Plug the audio cable into the 1/8" (3.5mm) stereo plug on controller from your audio source




The controller could also be connected to a Marine Head Unit or Android / iPhone Smart phone

The sensitivity of the controller is adjusted by the volume button of sound player.

Please keep volume less than 70% to prevent the controller overloaded.


Circuit diagram

Connections: R (red), G (green), B (blue) and BL (Black) +12 VDC

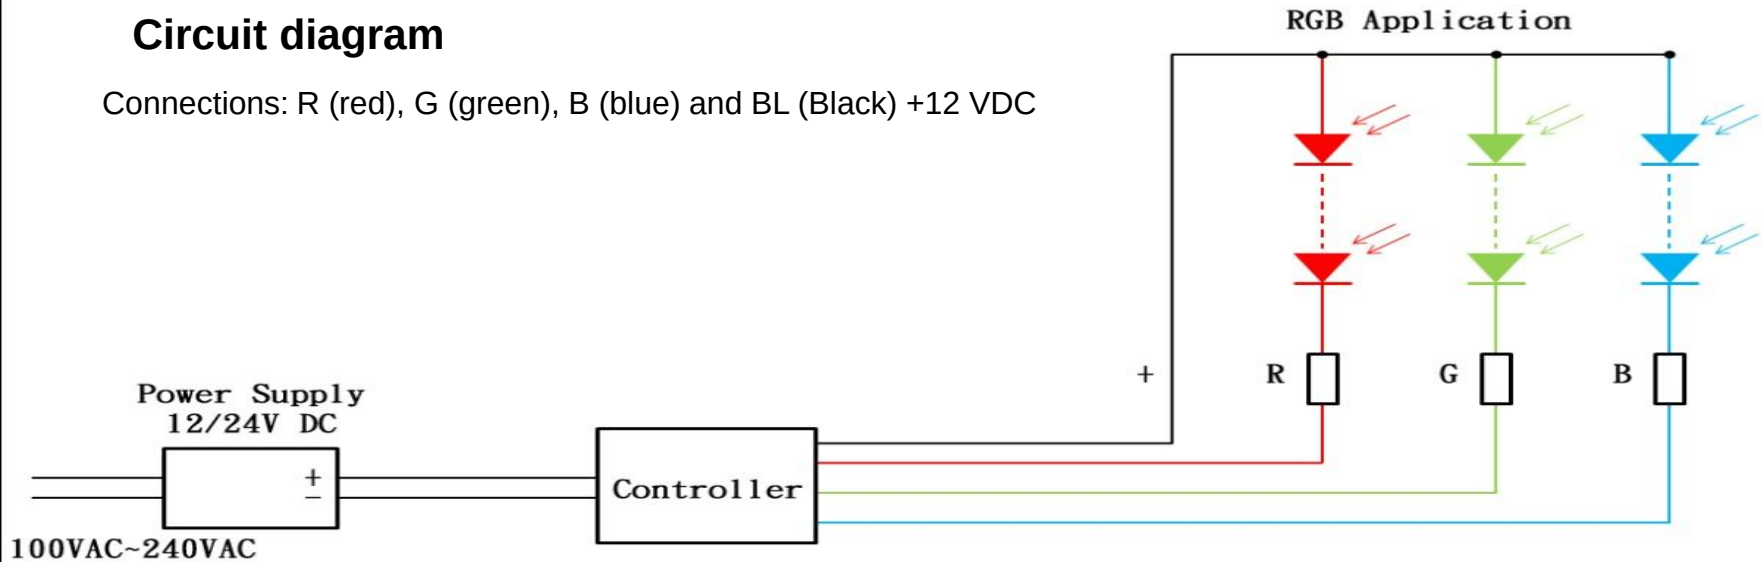

Technical data:

- The controller will keep the last mode in memory by power switch ON/ OFF
- Operating temperature: -20 ° C to + 45 ° C
- Working voltage: 12/24V DC
- Output: 2 channels (RGB)
- Control variant: common anode
- Sound Control:> 60 dB
- Output current: max.12A
- Wireless frequency : 433.92MHz
- Receiving range:20-30 meters
- Maximum output power (for 12V Input): 144W
- Maximum output power (for 24V Input): 288W
- RF remote control
- For control of RGB LED RGB strips with 12/24VDC operating voltage

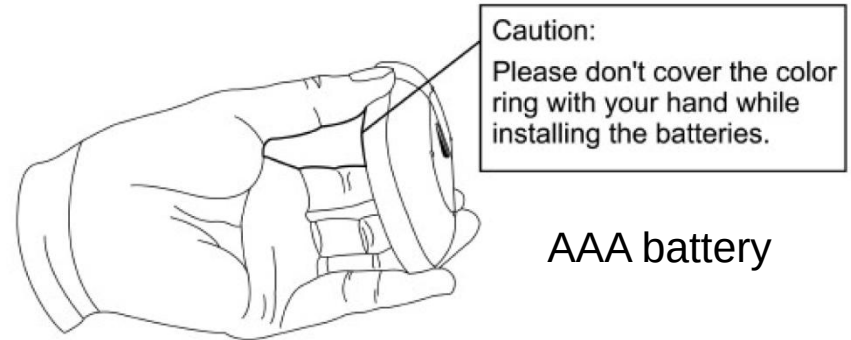

AAA battery